

DRIESCHER - Air-insulated Medium Voltage Switchgears

- Type F24 - 606519-27
- Type F24 - 756519-27
- Type F24 - 906519
- Rated voltage 24 kV
- Rated current 630 A



Driescher Moosburg
switching • electricity • safety
www.driescher.com

F 24

ELEKTROTECHNISCHE WERKE
FRITZ DRIESCHER & SÖHNE GMBH

D-85366 MOOSBURG • TEL. +49 87 61 6 81-0 • FAX +49 87 61 68 11 37
<http://www.driescher.com> infoservice@driescher.de



DRIESCHER - 24 kV Switch Panels Type F24

according to EN 62271-200

Content

- 2 General, Operating Conditions, Technical Standards
- 3 Equipment and design, Technical data
- 4 Switch panel variants F24 - 606519-27
- 5 Switch panel variants F24 - 756519-27
- 6 Switch panel variants F24 - 906519
- 8 Advantages, Auxiliary equipment, Weights

General

The metal enclosed, air insulated switchgears of Type F 24 are for universal application:

From compact ring cable units up to complex power distribution systems.

Tailored to meet the demand of municipal utility corporations and power supply companies in industry and public buildings.

The designation "F" stands for Front installation, i.e. the switches are installed directly on the base frame on the front side of the switch panel. These systems meet the specific requirements of the user in every respect and ensure a satisfactory power distribution.

The switch panels have been subjected to corresponding type testing in compliance with DIN EN 62271-200.

The air insulated switchgears of Type F 24 are metal enclosed and meet the partition class PI as specified in EN 62271-200.

- Type F24 - 606519-27
600 mm wide, 650 mm in depth and 1900 mm high
- Type F24 - 756519-27
750 mm wide, 650 mm depth and 1900 mm high
- Type F24 - 906519
900 mm wide, 650 mm depth and 1900 mm high

They can be delivered as individual panels or as a switchgear system in which the equipment, order of panels etc. can be optionally designed.

Operating conditions

The switch panels of Types F 24 are installed in closed electrical operating areas which are only to be accessed by trained personnel and instructed persons (access level A).

Installation can be carried out at levels of up to 1000 meters above sea level.

At levels above 1000 meters the rated insulating level of the switchgear must be corrected accordingly.

The switch panels are designed for use under normal operating conditions in compliance with DIN EN 60694.

Technical standards

The design of the air-insulated switch panels corresponds to the requirements specified in the DIN EN 62271-200. The resistance of the switch panels to accidental arcs has been successfully verified by a neutral testing institute corresponding to IAC - AFL

16/20 kA; 1 s. The installed switches of Type H27 are designed in compliance with the corresponding switchgear standards.

The switch panels correspond to protection class IP 3X.

Equipment and design of the switch panels Type F24

Equipment

The switch panels of Type F24 are available in the following versions:

- Cable feeder panel Type FK
- Transformer feeder panel Type FT
- Metering panel Type FM
- Bus sectionalizer panel Type FÜ
- Riser panel Type FH

Switch disconnector panels can be fitted with make-proof earthing switches.

The installed earthing switches can be manually operated, the switch disconnectors can be operated manually or with motor-operated mechanism with closed panel door.

With pressure relief in upward direction, arc barriers of 250 mm in height are mounted across the front and the side walls. Connecting cables are fed in from the bottom into the switch panels and are fastened to cross bars which are adjustable in two dimensions.

Through the optional locking of switch disconnector and earthing switch, wrong operations are practically ruled out.

For earthing and short-circuiting there are earthing switches or spherical switch points available.

If need be, it is possible to install corresponding surge voltage protectors in the panel.

All switch panels are designed with central locking and double-bit key.

There are additional locking features available by means of profile cylinders or padlocks, if required.

Design of the switch panels

The switch panel frame is made of a screwed, hot-galvanized composite structure.

The front side of the switch panels has a single-wing door of steel plate. The door hinge can be mounted on-site optionally on the right or left. A window of compound glass is inserted in the door.

Each panel has a screwed rear wall of galvanized steel plate.

Connecting cables are introduced from below and are mounted on cross bars which can be adjusted in two dimensions.

The doors and covers of the switchgear system are painted in structural paint (available in different colours, according to customer wishes).

Technical Data

Technical data of the switch panels Type F24

| | | | |
|---|----------|--------|---------|
| Rated voltage | Ur | 24 | kV |
| Rated lightning impulse withstand voltage | Up | 125 | kV |
| Rated short-duration power-frequency withstand voltage Ud | 50 | | kV |
| Rated (operating) current | Ir | 630 | A |
| Rated short-time current | Ik | 16/20 | kA |
| Accidental arc qualification | IAC A FL | 16/20* | kA / 1s |
| Category for operating availability | LSC1 | | |
| Partition class | PI | | |

* 20 kA with pressure relief in downward direction

| Switch disconnector Type | H27 F-EK | H27 F-SuT ¹⁾ |
|---------------------------|-------------|----------------------------|
| Rated (operating) current | Ir | 630 / 125 ²⁾ A |
| Rated short-time current | Ik | 16 ³⁾ kA |
| Rated impulse current | Ip | 40 ³⁾ kA |

¹⁾ Type H 27 SuT Switch disconnector – fuse combination

²⁾ in compliance with Driescher fuse table

³⁾ prospective values

Further technical data available in List 727

Fuse recommendations for Driescher HV-HBC fuse links Type STA and Type SSK

| Transformer rated power [kVA] | Fuse rated current in A | |
|--|-------------------------------------|-------------------------|
| | Rated voltage Ur = 24 kV | |
| | Fuse gauge e = 442 ⁻¹ mm | mind. (A) max. (A) |
| 50 | 6,3 | 6,3 |
| 80 | 6,3 | 6,3 |
| 100 | 6,3 | 10 |
| 125 | 10 | 16 |
| 160 | 10 | 20 |
| 200 | 16 | 20 |
| 250 | 16 | 25 |
| 315 | 20 | 25 |
| 400 | 25 | 31,5 |
| 500 | 25 | 40 |
| 630 | 31,5 | 50 |
| 800 | 40 | 50 |
| 1000 | 50 | 63 |
| 1250 | | 63 |
| 1600 | | 80 |
| 2000 | 100, Typ SSK and tripping delay | |
| 2500 | 125, Typ SSK and tripping delay | |

Switch panel Typ F24 - 606519-27

Dimensions:

- **600 mm wide**
650 mm in depth
1900 mm high

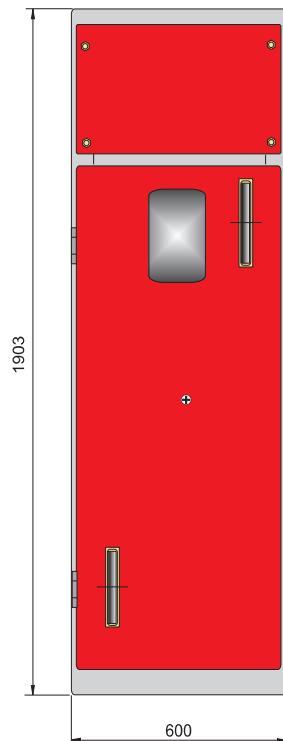


Fig. 1: Front view
FT24-606519-27

- ① Barrier cover (only for pressure relief in upward direction)
- ② Bus bar connection
- ③ Insulating material plate between the phases
(only with Type 606519)
- ④ Insulating protection plate*
- ⑤ Switch disconnector H27
- ⑥ Voltage transformer
- ⑦ Current transformer
- ⑧ Position indicator and connectable lever for switch disconnector
- ⑨ Position indicator and connectable lever for earthing switch
- ⑩ Earthing switch
- ⑪ HV-HBC fuse
- ⑫ Cable connection

* can be inserted with disconnected switch and when the panel door is closed.

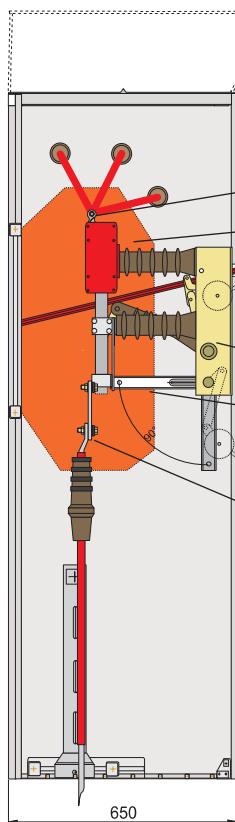


Fig. 2: Side view of cable feeder panel FK24-606519-27
With switch disconnector H27 EK

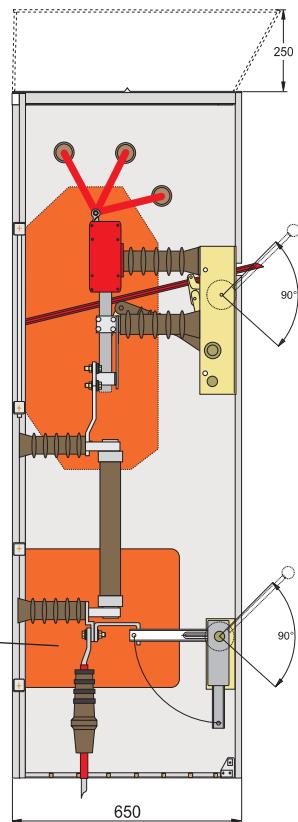


Fig. 3: Side view of transformer feeder panel FT24-606519-27 with switch disconnector-fuse combination H27 SuT


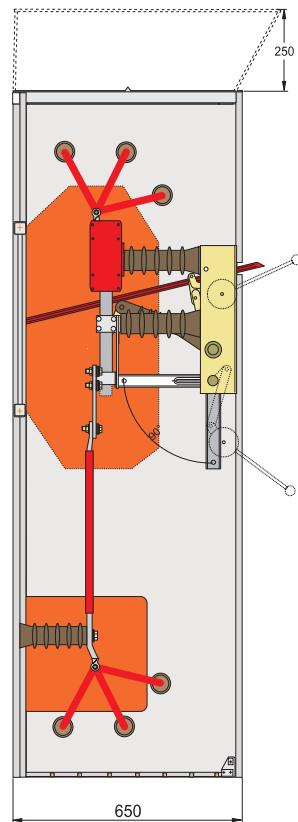


Fig. 4: Side view of Bus sectionalizer panel FÜ24-606519-72
with switch disconnector H27 EK


Switch panel Type F24 - 756519-27

Dimensions:


- 750 mm wide
650 mm depth
1900 mm high

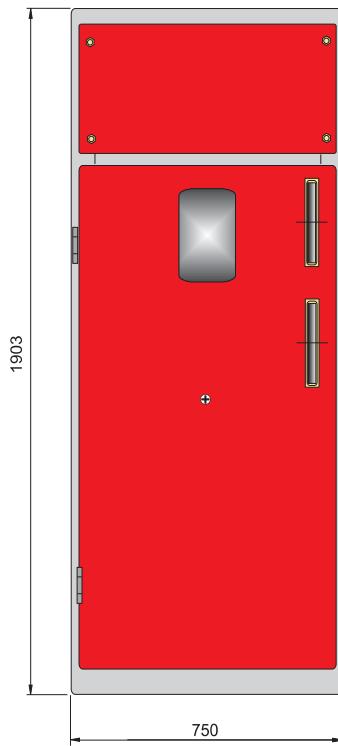


*Fig. 5: Front view
FK24-756519-27*

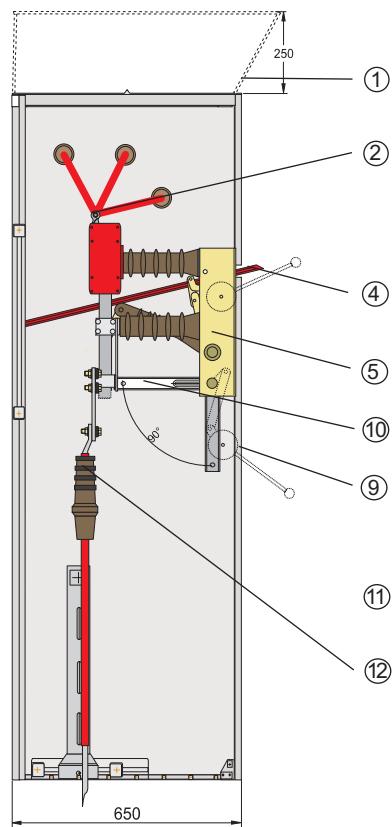

*Fig. 6: Side view of cable feeder panel
FK24-756519-27
With switch disconnector H27 EK*

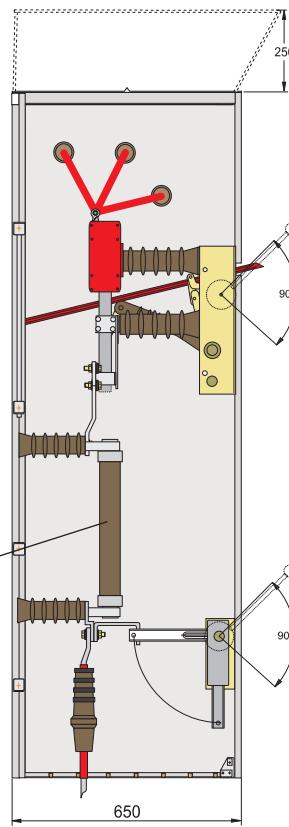

*Fig. 7: Side view of transformer feed panel
FT24-756519-27 with switch disconnector -
fuse combination H27 SuT*

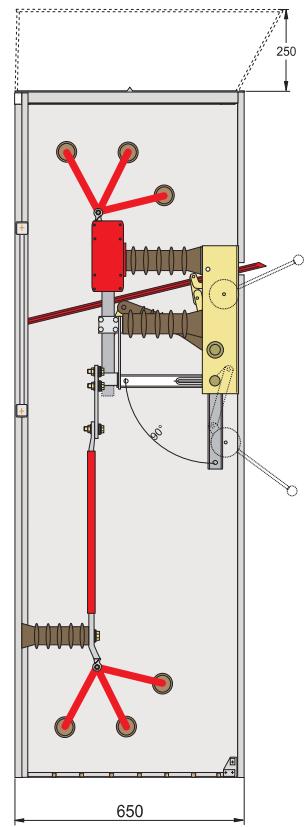


*Fig. 8: Side view of bus sectionalizer
panel FÜ24-756519-72 with switch
disconnector H27 EK*


Switch panel Type F24 - 906519

Abmessungen:


- 900 mm wide
650 mm depth
1900 mm high

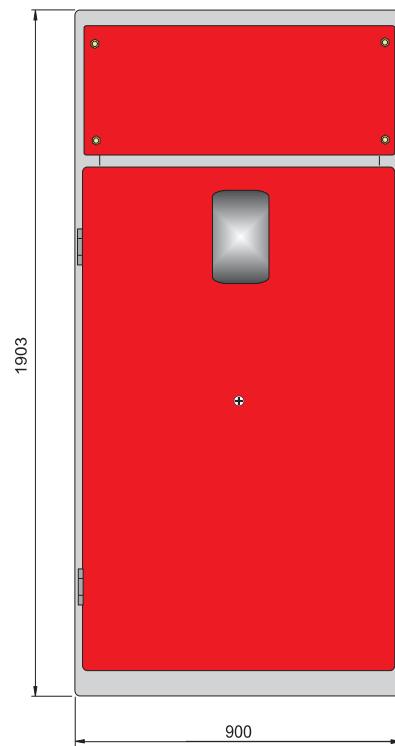

*Fig. 9: Front view of measuring panel
FM24-907519*

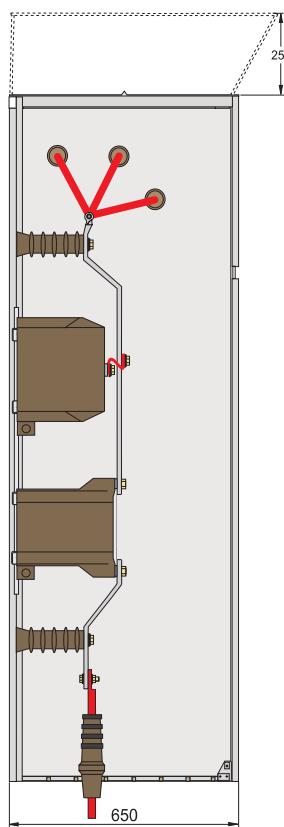

*Fig. 10: Side view
Measuring panel FM24-907519 with cable bridge
as well as current and voltage transformers*

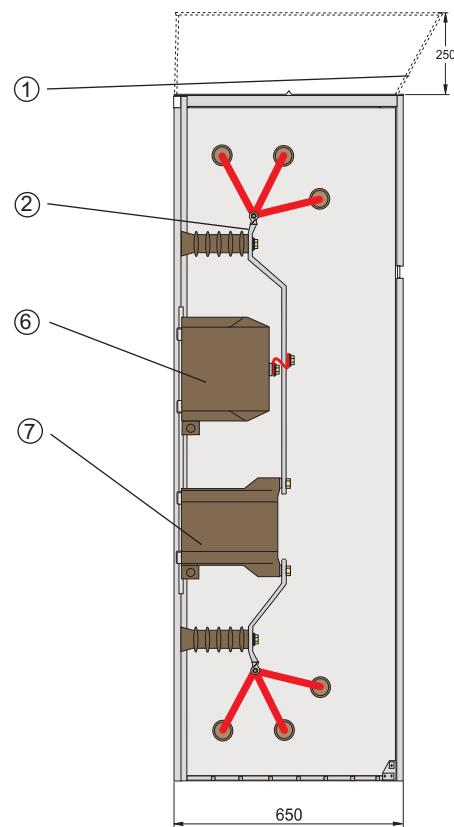

*Fig. 10: Side view
Measuring panel FM24-907519 with bar lead-over
as well as current and voltage transformers*

Switch panel Typ F - Testreport

ELEKTROTECHNISCHE WERKE FRITZ DRIESCHER & SÖHNE GMBH
 Typprüfbericht Nr. 5180-1-786 Seite: 2 Datum: 29.07.2003

2. Technische Parameter

Durch die Typprüfungen nach DIN EN 62271-200 wurden am Schaltfeld Typ FT 24-756519-27, U, 24 kV, I, 630/125 A n. Z. HA3-101494 folgende technische Parameter nachgewiesen:

| Luftisoliertes, metallgekapseltes Wechselstrom-Schaltfeld | Typ | FT 24-756519-27 |
|--|-------|--------------------|
| Bemessungsspannung | U_r | 24 kV |
| Bemessungs-(betriebs-)strom der Sammelschiene des Abganges | I_r | 630 A 630/125 A |
| Bemessungsfrequenz | f_r | 50 Hz |
| Bemessungs-Kurzzeitstrom | I_k | 16 kA |
| Bemessungs-Kurzschlußdauer | t_k | 1 s |
| Bemessungs-Stoßstrom | I_p | 40 kA |
| Bemessungs-Stehblitzstoßspannung Leiter-Leiter/Leiter-Erde über die Trennstrecke | U_p | 125 kV 145 kV |
| Bemessungs-Stehwechselspannung Leiter-Leiter/Leiter-Erde über die Trennstrecke | U_d | 50 kV 60 kV |
| Klasse für innere Lichtbögen | IAC | AFL 16 kA 1 s |
| Schutzgrad | | IP 3X |
| Kategorie der Betriebsverfügbarkeit | | LSC 1 |
| Schottungsklasse | | PI |

3. Zusammenfassung der Prüfergebnisse

Das geprüfte Schaltfeld vom Typ FT 24-756519-27, U, 24 kV, I, 630/125 A nach Zeichnung HA3-101494 hat die auf Seite 1 angegebenen Typprüfungen bestanden und erfüllt die Anforderungen entsprechend DIN EN 62271-200.

Moosburg, den 29.07.2004

I. Scharlach
bestätigt
i.A. A. Scharlach

H. Göhlsch
Leiter Technik
i. A. Th. Göhlsch



INSTITUT „PRÜFFELD FÜR ELEKTRISCHE HOCHLEISTUNGSTECHNIK“ GMBH



TYPPRÜFBERICHT

NR. 1283.0326.4.175

AUFRAGGEBER

Elektrotechnische Werke
Fritz Driescher & Söhne GmbH
Driescherstraße 3
85368 Moosburg

HERSTELLER

Elektrotechnische Werke

Fritz Driescher & Söhne GmbH

PRÜFOBJEKT

Metallgekapselte Wechselstrom-Schaltanlage

TYP

F24-756519

FERTIGUNGS-NR.

Prüfmuster

| | | | |
|------------------------------|-------------------|-------|--|
| Bemessungsspannung | U_r | 24 kV | BEMESSUNGS-DATEN NACH ANGABEN DES AUFRAGGEBERS |
| Bemessungs(betriebs)strom | I_r | 630 A | |
| Bemessungs-Stoßstrom | I_p | 40 kA | |
| Bemessungs-Kurzzeitstrom | I_k | 16 kA | |
| Bemessungs-Kurzschlusssdauer | t_k | 1 s | |
| Klasse für Innere Lichtbögen | IAC AFL 16 kA 1 s | | |

PRÜFVORSCHRIFT

IEC 60694: 2002-01
DIN EN 60694 (VDE 0670 Teil 1000): 2002-09
IEC 62271-200: 2003-11

UMFANG DER PRÜFUNG

Prüfung des Verhaltens bei inneren Fehlern

DATUM DER PRÜFUNG

02. Juni 2004

Die den Umfang der Prüfung betreffenden Bemessungswerte des PRÜFERGEBNISSES
Prüfobjektes wurden nachgewiesen.
Die Prüfung wurde BESTÄNDEN.

H. Göhlsch
H. GLÄSCH
Leiter Hochleistungs-Prüffeld

Berlin, den 04. August 2004

L.-M. Boettcher
L.-M. BOETTCHER
Verantwortlicher Prüflingenieur


Deutsche Akkreditierungsgesellschaft für Prüflinge
DAT - P - 019/92

IPH · LANDSBERGER ALLEE 378 · D-12681 BERLIN · TEL. 030/54 96 02 00 · FAX 030/54 96 02 22



Advantages

- **Flexible**, through combinable features
- **Safe**, based on the high quality of our products
- **Economic**, through constant further development
- **Compact dimensions**
- **Easy operation**
- **Minimum amount of maintenance**

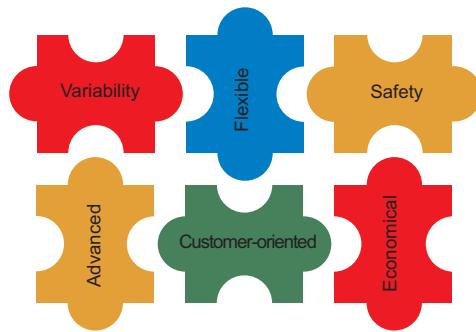

Auxiliary equipment

- Panel illumination
- Base
- Busbar earthing with spherical bolts
- Capacitive voltage testing system
- Installation of surge voltage protectors
- Short-circuit indicator
- Floor covers
- Additional locking options with profile cylinder and lockable operating mechanisms
- Wiring niche

Weights

| Type | Designation | Weight approx. kg | Drawing No. |
|-----------------|-------------------------|-------------------|-------------|
| FK 24-606519-27 | Cable feeder panel | 600 mm wide | 155 |
| FT 24-606519-27 | Transformer panel | 600 mm wide | 170 |
| FÜ 24-606519-27 | Bus sectionalizer panel | 600 mm wide | 165 |
| FH 24-606519-27 | Riser panel | 600 mm wide | 125 |
| FK 24-756519-27 | Cable feeder panel | 750 mm wide | 180 |
| FT 24-756519-27 | Transformer panel | 750 mm wide | 195 |
| FÜ 24-756519-27 | Bus sectionalizer panel | 750 mm wide | 185 |
| FH 24-756519-27 | Riser panel | 750 mm wide | 145 |
| FM 24-906519 | Measuring panel | 900 mm wide | 220 |

For assembly, commissioning and maintenance proceed as specified in the respective instructions B 786

Dimensions, weights , diagrams and descriptions in the list are non-binding. Subject to change without notice.

switching • electricity • safely

ELEKTROTECHNISCHE WERKE
FRITZ DRIESCHER & SÖHNE GMBH

D-85366 MOOSBURG • TEL. +49 87 61 6 81-0 • FAX +49 87 61 68 11 37
<http://www.driescher.com> infoservice@driescher.de

